


LED DOWNLIGHT

Product&Family Code: 016 016 0015

CLARA-15




Technical Drawing

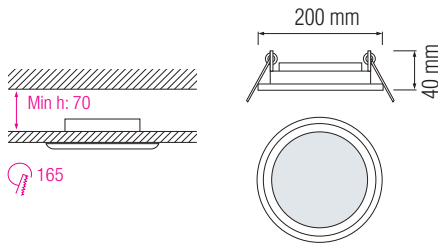

Technical Data	
Voltage (V)	100-265V
Product Wattage (W)	15
Equivalence with incandescent lamp	120
Colour Render Index (Ra)	>Ra70
Colour Temperature (K)	3000K / 4200K / 6400K
Materials	Aluminium Die Casting Body
Protection Class	II
Dimmable	No
EEI	A to A++
Warm-up time up to 60 % of the full light output	Instant Full Light
Luminous Flux (lm)	1150
Luminous Efficacy (lm/W)	76
Rated Life (hrs) ⌚	30.000
IP Rating	20
Power Factor	>0.5
Beam Angle	120°
Starting Time	<0.2s
Number of ON-OFF cycling	x25.000

Photometric Diagram

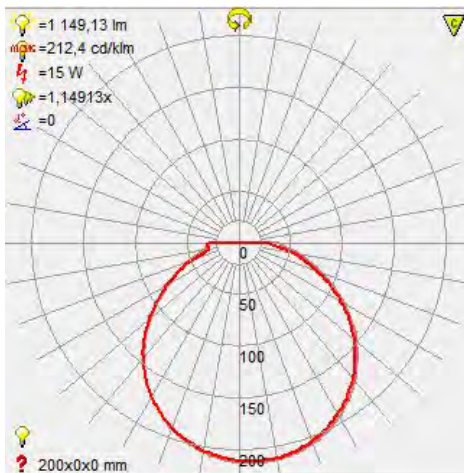

Applications

- Airport, Bathroom, Bedroom, Car Park, Cinema, Gallery, Hospital, Hotel, Kitchen, Museum etc.



Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- SMD LED Lamp Base.
- Aluminum Die Casting Body

