

Track light projector

5905339383938



**Switch
Power**



The new KANLUX LTL TRACKLIGHT family of luminaires is an innovative solution based on Kanlux TEAR rails, ideal for commercial and architectural lighting systems. The integrated LED luminaire with high luminous efficacy of 140 lm/W guarantees excellent energy efficiency, which is confirmed by a 5-year warranty. The luminaires allow you to choose lenses with an angle of 90° (standard) or 60°. Thanks to the high color rendering index CRI 90, the luminaire ensures faithful color reproduction, which is crucial in spaces where precise lighting is of great importance.

The KANLUX LTL 42W-114-CCT-ADJ model is distinguished by an additional function of changing the light direction by up to 45°, which allows for flexible directing of the light to selected points. In turn, the minimalist version of KANLUX LTL 40W-114 CCT allows you to create a flat light line of any length, without visible gaps between modules. This is the ideal solution for aesthetic and functional lighting installations.

The luminaires are equipped with an adapter with DIPSWITCH switches, which allows easy selection of power and color temperature (in the range of 3000K, 3500K and 4000K) without the need to modify the installation. This modern and versatile solution will work well in office, retail and exhibition spaces, offering users full control over the quality and character of lighting.

GENERAL DATA:

Colour: black

Place of assembly: na szynę TEAR

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

Length [mm]: 1144

Width [mm]: 61

Height [mm]: 84

Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: max 38

Class of protection against electric shock: II


Lampshade material: plastic

Diode type: LED SMD

Luminous flux [lm]: max 5000 / 5245 / 5325

Colour temperature: Warm white, white

Track light projector

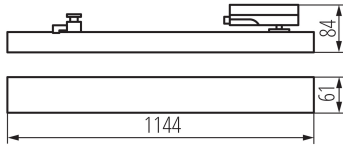

Correlated colour temperature [K]: 3000 / 3500 / 4000

Colour consistency in McAdam ellipses: 6

Colour rendering index: 90

Service life [h]: 50000

Number of on/off cycles: ≥ 30000

Lighting angle [°]: 90

Ambient temperature range to which the product can be exposed: 5+25

Enclosure material: aluminum alloy

Lighting-fixture angle regulation [°]: +45/-45

IP class: 20

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 12

Number of units in the secondary packaging: 1

Number of units in the packaging: 12

Net unit weight [g]: 1260

Grammage [g]: 1655.83

Gross unit weight [g]: 1544

Length of a unit pack [cm]: 117

Width of a unit pack [cm]: 10.5

Height of a unit pack [cm]: 8.5

Weight of a cardboard box [kg]: 19.86996

Width of a cardboard box [cm]: 37

Height of a cardboard box [cm]: 34.5

Length of a cardboard box [cm]: 119

Volume of a cardboard box [m³]: 0.151904

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website


38393 LTL 38W-114-CCT-ADJ-B

Track light projector


POWER SELECTION



CCT SELECTION



I out [mA]	1	2	3	4	Tc	[W]	[lm]
300	-	-	-	-	3000k	11,3	1505
					3500k	10,9	1565
					4000k	11,2	1590
350	-	-	-	ON	3000k	13,1	1765
				3500k	12,7	1850	
				4000k	13,1	1880	
400	-	-	ON	-	3000k	14,9	2015
			3500k	14,3	2115		
			4000k	14,8	2150		
450	-	-	ON	ON	3000k	16,7	2275
			3500k	16,2	2405		
			4000k	16,7	2425		
500	-	ON	-	-	3000k	18,6	2525
		3500k	17,9	2660			
		4000k	18,5	2695			
550	-	ON	-	ON	3000k	20,5	2780
		3500k	19,8	2915			
		4000k	20,4	2965			
600	-	ON	ON	-	3000k	22,1	3005
		3500k	21,3	3165			
		4000k	22,1	3200			
650	-	ON	ON	ON	3000k	24	3240
		3500k	23,1	3405			
		4000k	23,9	3450			
700	ON	-	-	-	3000k	26,1	3775
	3500k	25,2	3720				
	4000k	26,1	3775				
750	ON	-	-	ON	3000k	27,9	3770
	3500k	27	4045				
	4000k	27,9	4010				
800	ON	-	ON	-	3000k	29,6	3980
	3500k	28,5	4160				
	4000k	29,5	4230				
850	ON	-	ON	ON	3000k	31,4	4190
	3500k	30,3	4400				
	4000k	31,3	4470				
900	ON	ON	-	-	3000k	33	4390
	3500k	31,9	4610				
	4000k	33	4680				
950	ON	ON	-	ON	3000k	34,9	4610
	3500k	33,6	4830				
	4000k	34,8	4905				
1000	ON	ON	ON	-	3000k	36,4	4795
	3500k	35,1	5030				
	4000k	36,3	5105				
1050	ON	ON	ON	ON	3000k	38	5000
	3500k	37	5245				
	4000k	38	5325				

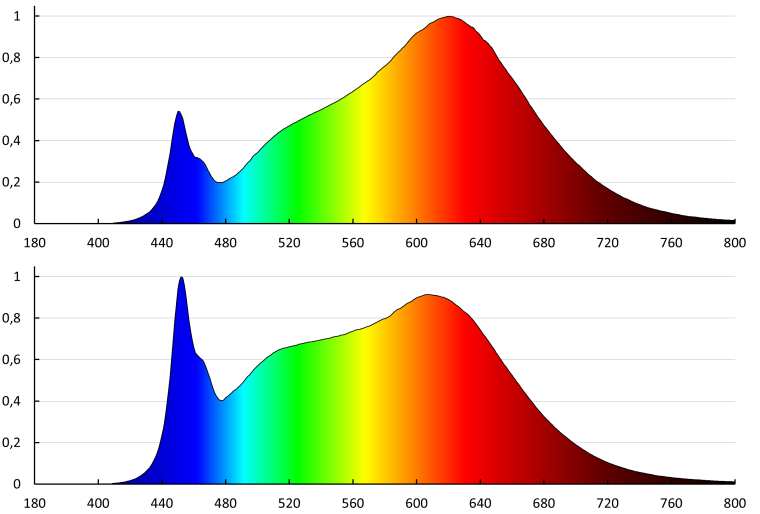

ACCESSORIES

38395

LTL LENS SET AS 35X35

Soczewka do oprawy LTL, asymetryczna kąt 35 stopni x 35 stopni, w zestawie 4szt, LTL LENS SET AS 35X35D (38395)



38394

LTL LENS SET S 60D

Soczewka do oprawy LTL z kątem świecenia 60 stopni, w zestawie 4 szt, LTL LENS SET S 60D (38394)

