

LED Track Light Berlin Slim Datasheet

Number of heads	1
Mounting	Track mounting
Lamps description	LED 30W 2700K-6000K, CRI 90+
Luminaire luminous flux	100W/Lm 3000Lm
Voltage (V)	220/240
Environment	Indoor
Notes	LED Track Light Berlin Slim driver is located inside of the thin luminaire adapter. This makes it possible to avoid additional heat when operating the luminaire.

OPTICAL

Reflector finish	Aluminum
Aiming	Adjustable 350 degrees
Light distribution symmetry	Symmetric
Beam angle	24° Medium
Color temperature	2700K-6000K

ELECTRICAL



Wattage	30W
Transformer mounting	Integral
Transformer type	Electronic
Frequency	50-60HZ
Voltage	110-240V AC

PHYSICAL


Spot diameter (mm)	Ø 70
Construction material	6063 Aluminium
Weight (kg)	1,0
Luminaire lifespan	50 000h
LED module	PHILIPS/BRIDGELUX COB LED 100 lm/W
Driver	LIFUD flicker free, PHILIPS SLIM, ALL-LOOKING
Working temperature	Operation: -30 to +40 °C



LED light to be installed on 3-phase 4 wire track.



Dimensions: 245 x Ø70mm

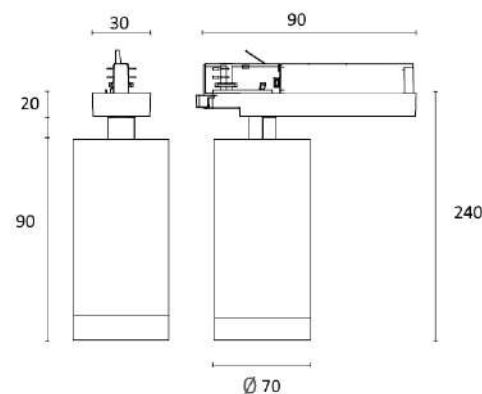

CERTIFICATIONS

